

Lead Free Brass Ball Valves ProPex x ProPex

Feature:

- ✓ Dezincification Resistant (DZR) Lead Free Brass
- ✓ ProPex end conform to ASTM F1960
- ✓ Forged Full Port Brass body
- ✓ Blow out proof stem design
- ✓ Packing nut, O-ring & packing on the stem seal
- ✓ Stainless Steel Ball
- ✓ Handle with vinyl grip
- ✓ Compatible with Water, Oil, Gas, Steam and Air applications



Pressure Rating:

- 400 psi (WOG/CWP) / 150 psi (WSP)
- Temperature range: -20°F to 300°F


Approvals:

IAPMO

NSF/ANSI 61, 372, 14



ISO9001:2015

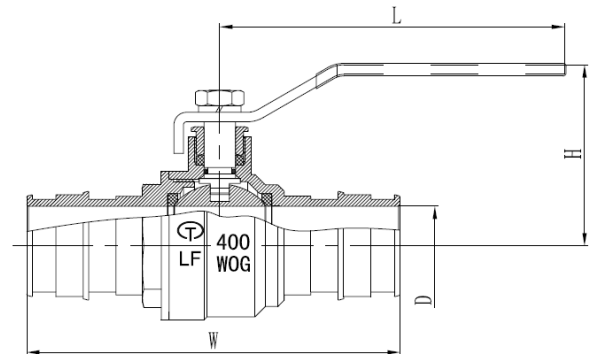

Part Name	Material
Body	Lead Free Brass
Seat	PTFE
Ball	Stainless Steel
Stem O-ring	NBR
Packing Nut	Brass
Stem	Brass
Lock Nut	Ferromagnetic Zinc plated
Lock Washer	Ferromagnetic Zinc plated
Packing	PTFE
Handle	Ferromagnetic Chrome plated
Cap	Lead Free Brass

Part#	Size	D	L	H	W
5031LF	1/2"	0.394	3.46	1.69	2.58
5032LF	3/4"	0.611	3.46	1.81	3.31
5033LF	1"	0.812	4.29	2.09	3.98
5034LF	1-1/4"	0.984	4.29	2.25	4.65
5035LF	1-1/2"	1.103	5.63	2.45	5.52
5036LF	2"	1.575	5.63	2.74	6.91
5037LF	2-1/2"	2.01	5.63	3.04	8.8
5038LF	3"	2.44	7.76	4.25	10.75

*Unit in Inch