


## TANKLESS WATER HEATER VALVES

### Feature:

- ✓ Dezincification Resistant (DZR) Lead Free Brass
- ✓ Solder-Joint Conform ASME B16.22
- ✓ Thread Conform ANSI B1.20.1
- ✓ Set of 2 Heavy Duty Forged Brass Body
- ✓ Double "O"-ring Stem Seal
- ✓ Stainless Steel Ball
- ✓ Large Drain Port Outlets(Full Port)
- ✓ Pressure Rating: 125 PSI Maximum
- ✓ Temperature Range : 40° F to 180° F

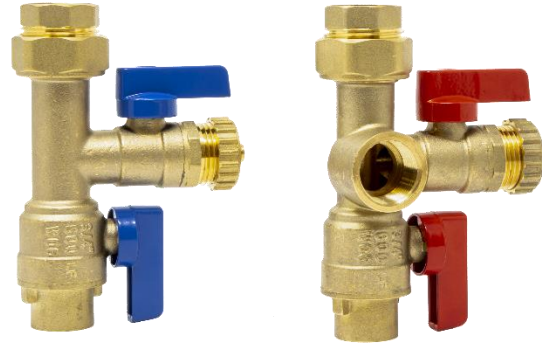

### Advantage:

- Compact Size
- Easy System Cleaning & Flushing
- Individually Controlled Drain Outlets
- Fewer Leak Paths




ISO9001:2015

### Approvals:




NSF/ANSI-61

NSF/ANSI-372



Part Name	Material
1 Cap	Lead Free Brass
2 Seat	PTFE
3 Ball	SS304
4 Gasket	PTFE
5 O-ring	EPDM
6 Stem	Brass
7 Spring Washer	Plated
8 Screw	Plated
9 Handle	Al-alloy
10 Body	Lead Free Brass
11 Cap	Lead Free Brass
12 Rubber Washer	EPDM
13 Cap Nut	Brass
14 Chain	PVC
15 Seat	PTFE
16 Ball	SS304
17 Snap Spring	SS304
18 Cap Nut	Brass
19 Rubber Washer	EPDM
20 Cap	Lead Free Brass
21 O-Ring	VITON

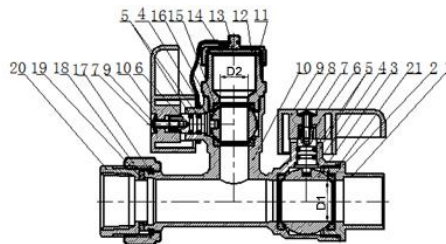

Cold Water Valve

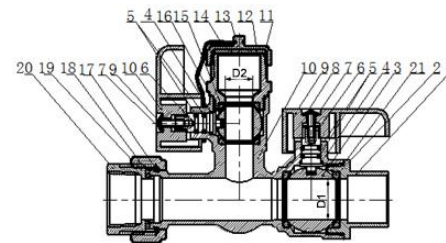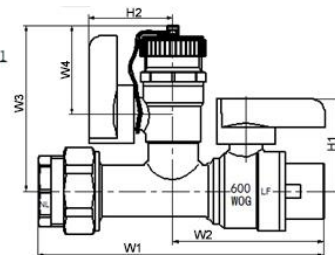

Hot Water Valve

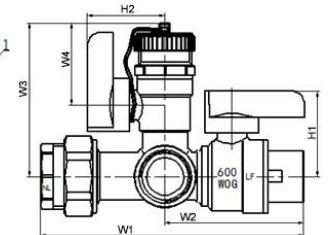

Part#	Size	D1	D2	D3	H1	H2	W1	W2	W3	W4	W5
5451LF	3/4" SWT	0.75	0.52	0.75	1.69	1.54	5.19	2.75	3.03	1.61	1.06
5452LF	3/4" IPS	0.75	0.52	0.75	1.69	1.54	5.02	2.75	3.03	1.61	1.06

\*Unit in Inch